


LE 207 TDT





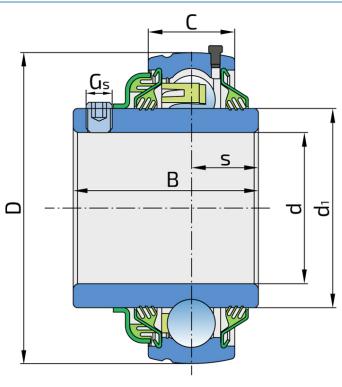

Technical Specification

| d | Bore diameter | 35 mm |
|------|--|------------|
| D | Outside diameter | 72 mm |
| В | Width inner ring | 42.9 mm |
| С | Width outer ring | 20 mm |
| S | Distance from inner ring side face to raceway centre | 15.5 mm |
| d1 | Outer diameter inner ring | 46.1 mm |
| Gs | Set screw | M6x0.75 mm |
| kg | Mass | 0.47 kg |
| Cdyn | Dynamic load rating | 25.5 kN |
| Со | Static load rating | 15.3 kN |
| Pu | Fatigue load limit | 0.643 kN |



Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants. The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

