


# Double Row Angular Contact Ball Bearing

## SL 5203.B-2T

Double Row Angular Contact Ball Bearing  
Seeding Machine

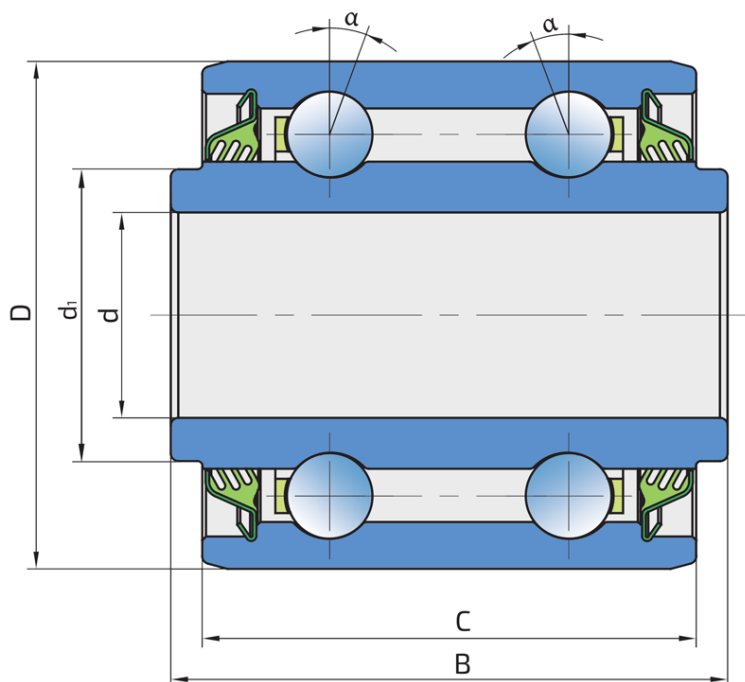

### Technical Specification

|          |                             |           |
|----------|-----------------------------|-----------|
| d        | Bore diameter               | 16.256 mm |
| d1       | Inner ring outside diameter | 23.5 mm   |
| D        | Outside diameter            | 40 mm     |
| B        | Width inner ring            | 44.12 mm  |
| C        | Width outer ring            | 39.12 mm  |
| $\alpha$ | Contact angle               | 30 °      |
| kg       | Mass                        | 0.218 kg  |
| Cdyn     | Dynamic load rating         | 14.2 kN   |
| Co       | Static load rating          | 8.8 kN    |
| Pu       | Fatigue load limit          | 0.37 kN   |

## Sealing

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

